

SoundSense RSIC-1 Decoupler Clips

For applications that demand a higher sound transmission reduction, SoundSense carries isolation decoupler clips allowing walls or ceilings “to float” in rooms where higher noise levels are a concern. Decoupler clips secure non-rigidly to framework while creating an airspace within the wall.



Applications:


- Home Theaters
- Mechanical Rooms
- Libraries/Study
- Gyms
- Golf Rooms
- master suites

Installation:

Decoupler clips are attached directly to studs, joists, or cement walls with approved screws (#8 X 2-½” course thread for wood, #8 1-5/8” fine threads for steel) in a staggered grid pattern determined by the weight of the ceiling or wall material it is supporting.

Drywall furring channels are then fed through the clips horizontally. Sheetrock is installed directly to the hat channel. For higher sound reduction, attach SoundSense LV-1 or SoundSense No 2 to the turning channels. Then add two layers of sheetrock to the SoundSense LV-1 & No 2.

RSIC-1 Wall or Ceiling System Framing at 16” o.c.

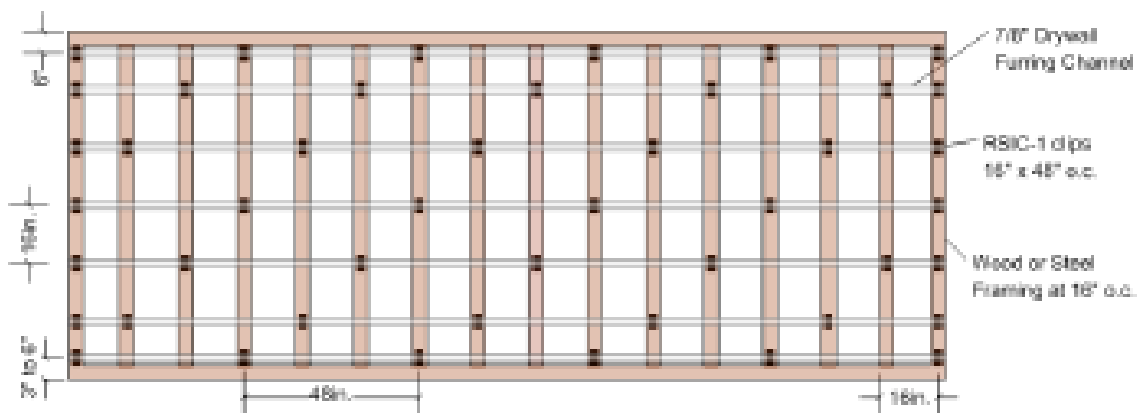

Physical Properties:

Clip Dimensions:	See Below
Thickness:	1 5/8" (including hat channel)
Material Composition:	Natural blend neoprene grommet pad, threaded shaft attached to a center bushing of electroplated zinc mild steel with a galvanized steel retainer clip
Hardness:	Shore A of 50 (neoprene grommet)
Tensile Strength:	10-11.2 MPa (neoprene grommet)
Heat Resistance:	70° C for 70 hours

